


ION

INDUSTRIES

PRODUCT CATALOGUE

2026



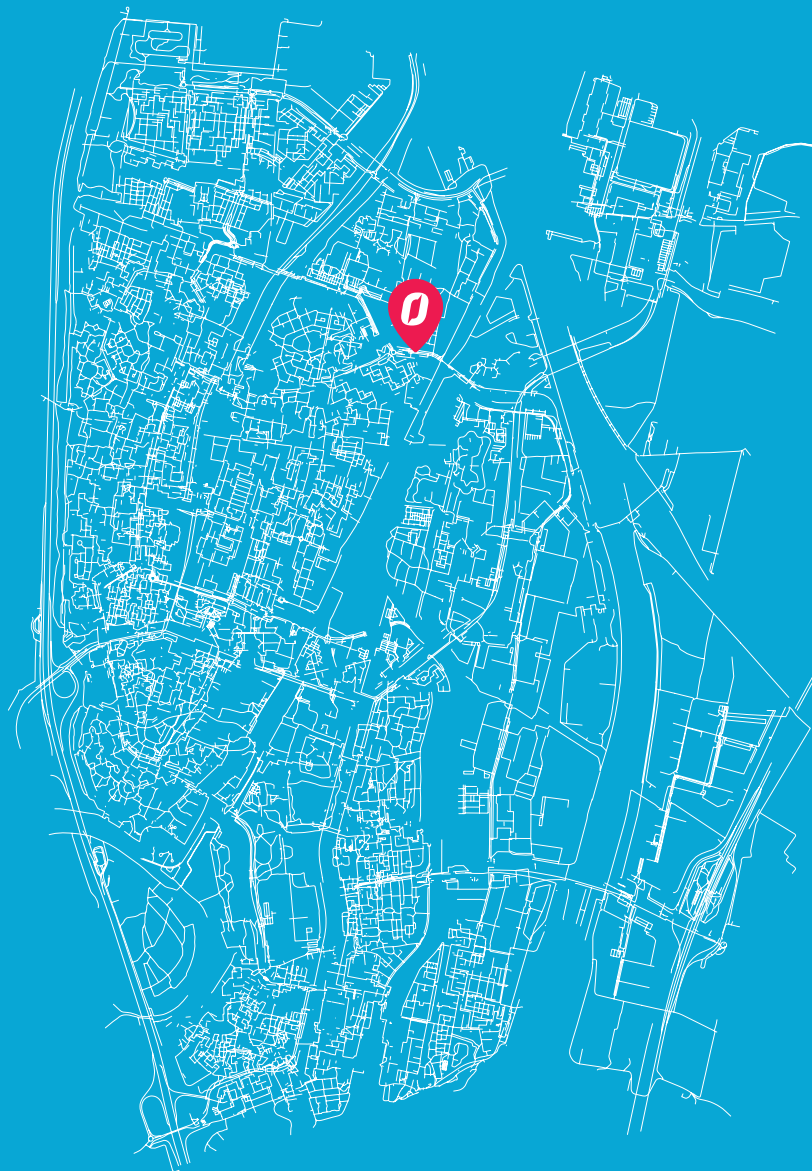

NIEUWEGEIN

WELCOME TO ION INDUSTRIES

ION INDUSTRIES specializes in switching material that combines quality, expertise and service. As both a manufacturer and distributor, we supply innovative LED dimmers, switches and four complete series of cover materials.

We make switching material simpler and more reliable by continuously listening to our customers and innovating. This allows us to combine high quality with affordability. As a total supplier, we offer switching material that not only works, but also surprises. Whether you choose the latest technology or trusted classics. Technology should not only be good, but also accessible to everyone.


QUALITY IS IN THE DETAILS

Our switchgear has been extensively tested and meets the highest quality and safety requirements. It carries international quality marks such as VDE, CE, and UKCA, which guarantee maximum reliability and safety. Designed for daily and intensive use, our products perform consistently in any environment.

PRODUCT RANGE

<i>LED DIMMERS</i>	<i>2</i>
<i>SWITCHES</i>	<i>11</i>
<i>V1/J1/D1-SERIE</i>	<i>14</i>
<i>E-1 SERIE</i>	<i>28</i>
<i>SURFACE-MOUNTED IP55</i>	<i>35</i>
<i>ADDITIONAL SWITCHING MATERIAL</i>	<i>37</i>
<i>EMERGENCY LIGHTING</i>	<i>39</i>


DISCOVER OUR WEBSITE

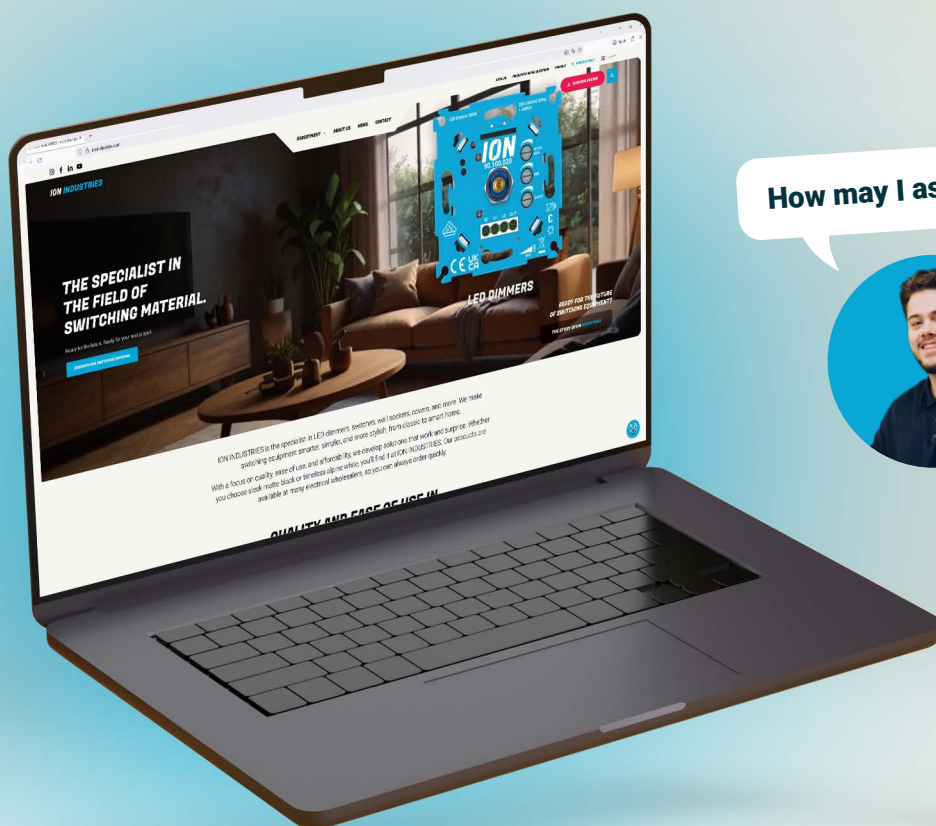

How may I assist you?



Watt's up?

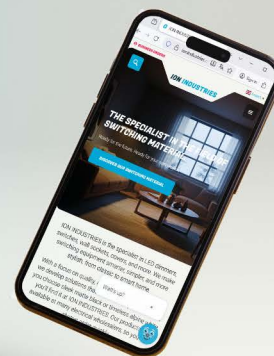

WWW.IONINDUSTRIES.COM

Don't have a business account in our webshop yet? Register now to see our complete range and immediately benefit from business prices. Ordering online is easy. Are you having trouble with something? Our manuals and FAQ will help you on your way, and Dimmy is available via chat to support you.



LED DIMMERS

ION INDUSTRIES offers an extensive range of LED Dimmers. Whether you opt for a single dimmer, smart dimmer or a specific dimming solution. Our dimmers are universally compatible with more than 95% of all LED lamps and cover materials, so you can be sure that you will always find the perfect dimmer for your situation.




LED DIMMER 150 WATT

- Dimming range 0.3 – 150 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness manually and automatically adjustable
- Additional output of 600 Watt to operate an extra switching function
- Can be used as two-way switching in combination with a switch
- Only phase wire and switch wire required
- Includes memory function




LED DIMMER 200 WATT

- Dimming range 0.3 – 200 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness manually and automatically adjustable
- Additional output of 600 Watt to operate an extra switching function
- Boost function to prevent popcorn effect
- Can be used as two-way switching in combination with a switch
- Only phase wire and switch wire required
- Includes memory function

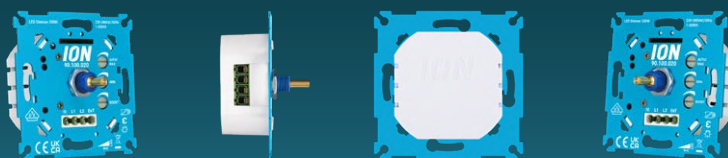

LED DIMMER 250 WATT PRO

- Purchase order terms and conditions apply
- Dimming range 0.3 – 250 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness manually and automatically adjustable
- Additional output of 600 Watt to operate an extra switching function
- Boost function to prevent popcorn effect
- Can be used as two-way switching in combination with a switch
- Includes memory function

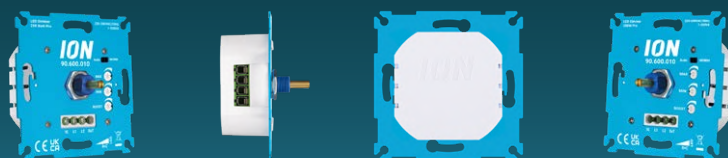



LED DIMMER 350 WATT

- Dimming range 0.3 – 350 Watt
- Compatible with 95%+ of cover material
- Additional output of 600 Watt to operate an extra switching function
- Can be used as two-way switching in combination with a switch
- Min/Max brightness manually and automatically adjustable
- Boost function to prevent popcorn effect
- Only phase wire and switch wire required
- Includes memory function



LED DIMMER 600 WATT

- Dimming range 0.3 – 600 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness manually and automatically adjustable
- Additional output of 600 Watt to operate an extra switching function
- Boost function to prevent popcorn effect
- Can be used as two-way switching in combination with a switch
- Only phase wire and switch wire required
- Includes memory function



LED DUO DIMMER 2x200 WATT

- Dimming range 2 x 0.3 – 200 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness manually and automatically adjustable
- Switching two groups with one wall switch
- Can be used as two-way switching in combination with a switch
- Only phase wire and switch wire required
- Includes memory function



LED DUO TOUCH DIMMER 2x150 WATT

- Dimming range 2 x 0.3 – 150 Watt
- Touch control
- Min/Max brightness manually adjustable
- Switching two groups with one wall switch
- Compatible with five Expansion Units from ION INDUSTRIES
- Only applicable in combination with ION Duo Touch Dimmer Buttons
- Only phase wire and switch wire required
- Includes memory function




90.500.070



LED MATTER DIMMER 200 WATT

- Dimming range 0.3 – 200 Watt
- Officially registered with Matter
- Min/Max brightness adjustable via potentiometer
- Boost function to prevent popcorn effect
- Phase and switch wire required, neutral wire recommended
- Can be used as two-way switching in combination with a switch
- Compatible with Matter
- Includes memory function
- Push-turn knob

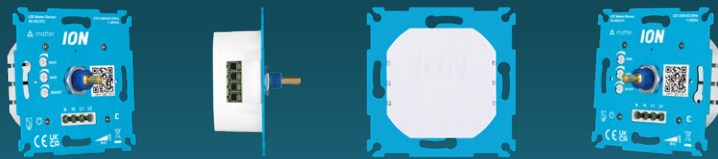


90.500.020



LED ZIGBEE DIMMER 200 WATT

- Dimming range 0.3 – 200 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness adjustable via dimmer and application
- Boost function to prevent popcorn effect
- Phase and switch wire required, neutral wire recommended
- Operable with online application and physical button

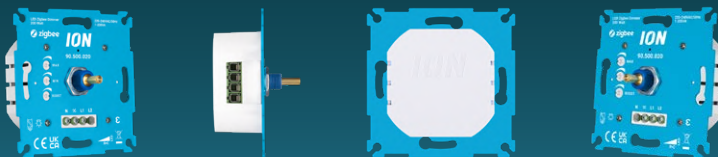



90.500.090

LED ZIGBEE MASTER-SLAVE DIMMER SET

- Dimming range 0.3 – 200 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness adjustable via dimmer and application
- Can be used in two-way and intermediate switching
- Boost function to prevent popcorn effect
- Phase and switch wire required, neutral wire recommended
- Operable with online application and physical button
- Compatible with five Slave LED Dimmers from ION INDUSTRIES



90.500.030

LED ZIGBEE TOUCH DIMMER 200 WATT

- Dimming range 0.3 – 200 Watt
- Min/Max/Boost/Speed manually adjustable with potentiometers
- Phase and switch wire required, neutral wire recommended
- Compatible with five Expansion Units from ION INDUSTRIES
- Can be used as two-way switching in combination with a switch
- Only applicable in combination with ION Touch Dimmer Buttons
- Includes memory function



90.500.040

LED ZIGBEE DIM MODULE 200 WATT

- Dimming range 0.3 – 200 Watt
- Compatible with all momentary push-button switches
- Min/Max/Boost manually adjustable with potentiometers
- Phase and switch wire required, neutral wire recommended
- Two-way/intermediate switching possible
- Dimming speed adjustable with speed function potentiometer
- Includes memory function



90.500.010

LED WIFI DIMMER 200 WATT

- Dimming range 0.3 – 200 Watt
- Compatible with Tuya
- Compatible with 95%+ of cover material
- Operable with online application and physical button
- Phase and switch wire required, neutral wire recommended





90.400.030

MASTER-SLAVE LED DIMMER SET

- Dimming range 0.3 – 200 Watt
- Compatible with 95%+ of cover material
- Min/Max brightness adjustable
- Boost function to prevent popcorn effect
- Compatible with five Slave LED Dimmers from ION INDUSTRIES
- Can be used in two-way and intermediate switching
- Only phase wire and switch wire required
- Includes memory function



90.400.020

SLAVE LED DIMMER

- Only applicable in combination with a LED Master Dimmer
- Compatible with 95%+ of cover material
- Can be used in two-way and intermediate switching



LED TOUCH DIMMER 200 WATT

- Dimming range 0.3 – 200 Watt
- Touch control
- Min/Max brightness manually adjustable
- Boost function to prevent popcorn effect
- Compatible with five Expansion Units from ION INDUSTRIES
- Two-way switching/dimming parallel possible
- Only phase wire and switch wire required
- Only applicable in combination with ION Touch Dimmer Buttons



LED TOUCH DIMMER EXTENSION UNIT

- Touch control
- Two-way switching/dimming parallel possible
- Compatible with five Expansion Units from ION INDUSTRIES
- Only to be used with LED Touch Dimmer(s) from ION INDUSTRIES
- No settings required, functions according to settings of LED Touch Dimmer(s)
- Only phase wire and switch wire required
- Only applicable in combination with ION Touch Dimmer Buttons



LED CONTROLLER 1-10 VOLT

- Compatible with 95%+ of cover material
- 1-10V for dimming dimmable LED Drivers
- Highly suitable for a wide dimming range
- Easy to install



LED DIM MODULE 200 WATT

- Dimming range 0.3 – 200 Watt
- Compatible with all momentary push-button switches
- Min/Max/Boost manually adjustable with potentiometers
- Two-way/intermediate switching possible
- Dimming speed adjustable with speed function
- Only phase wire and switch wire required
- Includes memory function







LED DIMMER WITH INDICATOR LIGHT **BLUE**

90.100.120

- Dimming range 0.3 – 200 Watt
- Includes indicator light with two brightness levels
- Boost function to prevent popcorn effect
- Min/Max brightness adjustable
- Includes memory function
- Can be used as two-way switching in combination with a switch
- Indicator light blue included as standard (also available separately)
- Available in the colours: Fuchsia, Red, and Warm White

AVAILABLE IN ALPIN WHITE AND MATT ALPIN WHITE

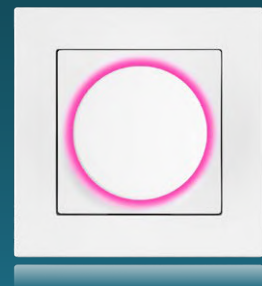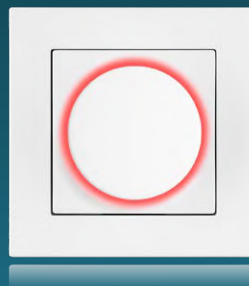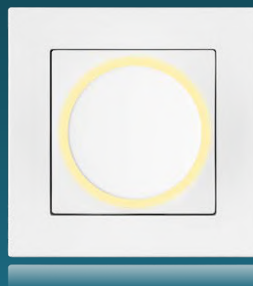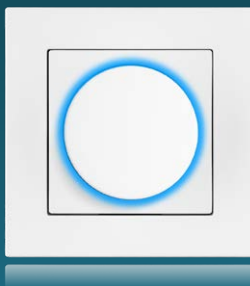

FUTURISTIC AND EASY TO FIND



BLUE



WARM WHITE



RED



FUCHSIA

**90.300.030****LED CORD DIMMER WHITE 75 WATT**

- Dimming range 0.3 – 75 Watt
- Min/Max brightness adjustable
- Speed function
- Push-button control
- Can be used with multiple types of cable (0.5 to 1.5 mm²)
- Includes memory function

**90.300.031****LED CORD DIMMER BLACK 75 WATT**

- Dimming range 0.3 – 75 Watt
- Min/Max brightness adjustable
- Speed function
- Push-button control
- Can be used with multiple types of cable (0.5 to 1.5 mm²)
- Includes memory function

**90.300.040****LED FLOOR DIMMER WHITE 75 WATT**

- Dimming range 0.3 – 75 Watt
- Min/Max brightness adjustable
- Speed function
- Push-button control
- Can be used with multiple types of cable (0.5 to 1.5 mm²)
- Includes memory function

**90.300.041****LED FLOOR DIMMER BLACK 75 WATT**

- Dimming range 0.3 – 75 Watt
- Min/Max brightness adjustable
- Speed function
- Push-button control
- Can be used with multiple types of cable (0.5 to 1.5 mm²)
- Includes memory function



SWITCHES

ION INDUSTRIES offers the right switch for every situation. Whether you choose a two-way switch or a two-gang switch, with or without a pulse function. Combine them with four stylish series of cover materials in Alpine White, Matt Alpine White or Matt Black. This ensures that our switches fit effortlessly into any interior and allow you to switch your lights on and off effortlessly, just the way you want it.

SWITCHES



10.300.010

**2-WAY
SWITCH**



10.300.020

**2-GANG
DOUBLE SWITCH**



10.300.030

**DOUBLE-POLE
SWITCH**



10.300.040

**INTERMEDIATE
SWITCH**



10.300.050

**DOUBLE TWO-WAY
SWITCH**



10.300.060

**2-GANG MOMENTARY
PUSH SWITCH**



10.300.070

**MOMENTARY PUSH
SWITCH**



10.300.080

**BLIND/SHUTTER
CONTROL SWITCH**



11.300.010

**3-POSITION SWITCH
WITH CENTRE-OFF**





V1/J1/D1 SERIES

The V1 series has a modern look, the J1 series is timeless and the D1 series is robust. All series can be combined with each other. This allows you to varyate with different styles, while the inner components remain the same. Available in Alpine White, Matt Alpine White and Matt Black.

V1 COVER FRAMES



80.300.114



80.300.214



80.300.314



80.300.414



80.300.514

J1 COVER FRAMES



80.301.114



80.301.214



80.301.314



80.301.414



80.301.514

D1 COVER FRAMES



80.303.114



80.303.214



80.303.314




80.303.414



80.303.514

SMART COMBINATIONS WITHOUT LIMITATIONS

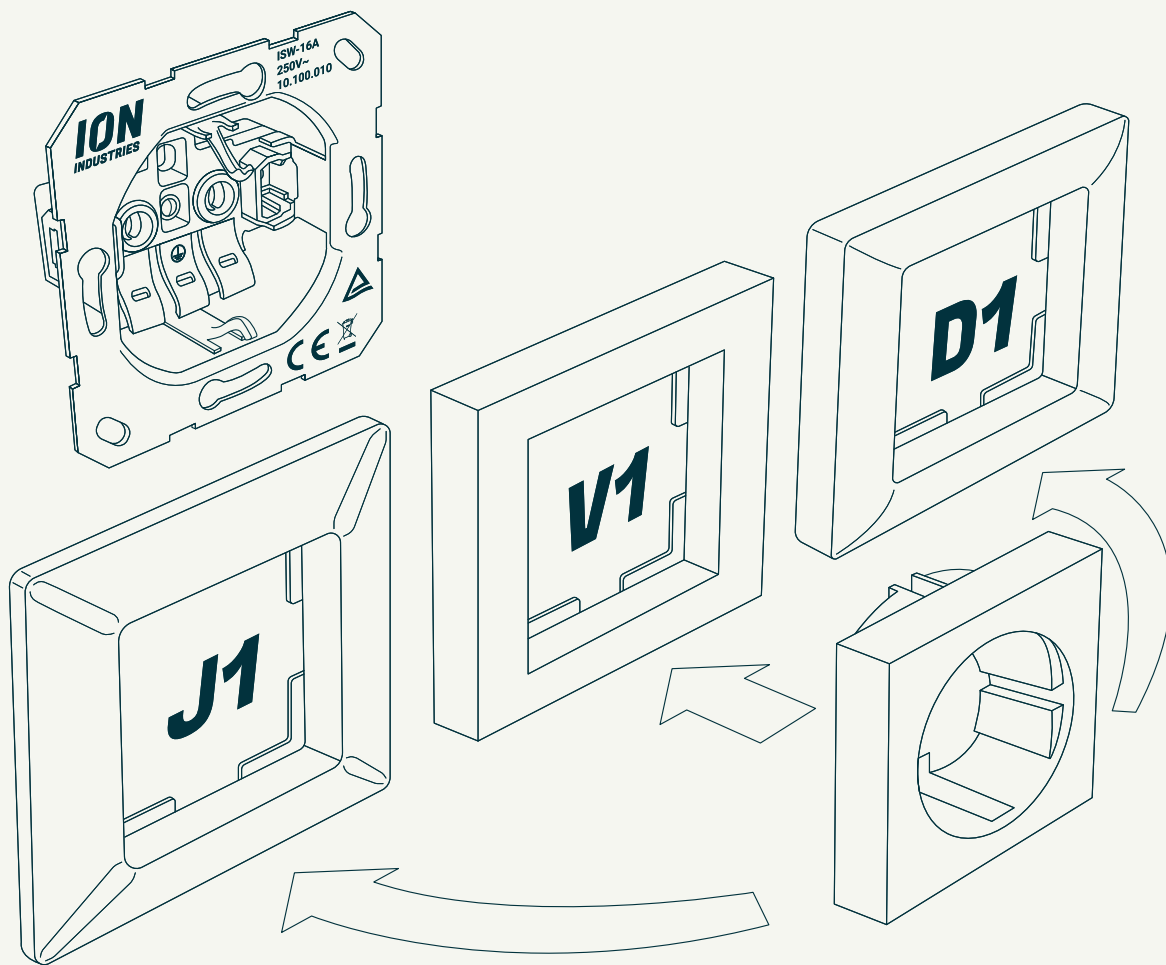

All products from the V1, J1 and D1 series can be combined with each other.
This allows you to effortlessly change styles without changing the inner components.



10.300.414

WALL SOCKET PE **USB A + USB C** WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 32 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 3 A
- Certification: TUV



10.300.814

**WALL SOCKET RA WITH
HINGED COVER IP44 AND
TOUCH PROTECTION**



10.100.011

**WALL SOCKET WITH
PROTECTIVE EARTH**



10.300.914

**WALL SOCKET WITHOUT
PROTECTIVE EARTH WITH
TOUCH PROTECTION**



10.300.214

**WALL SOCKET WITH
PROTECTIVE EARTH AND
TOUCH PROTECTION**




10.300.514

WALL SOCKET PE **2x USB C** WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 36 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 7 A
- Certification: CE






20.300.014

**ROCKER
TWO-WAY SWITCH**




20.300.114

**ROCKER
TWO-GANG SWITCH**




20.300.214

**BLIND
SWITCH ROCKER**




20.300.514

**CENTRAL PLATE CHARGER
USB A + USB C**




20.300.414

**CENTRAL PLATE
DIMMER BUTTON DUO**



11.300.114

**CENTRAL PLATE WITH
ROTARY KNOB
3-POSITION SWITCH
WITH CENTRE-OFF**




20.300.314

**CENTRAL PLATE DIMMER
BUTTON SINGLE**




20.300.614

**CENTRAL PLATE DIMMER
BUTTON SINGLE FOR
INDICATOR LIGHT**



80.300.084

**TOUCH DIMMER
BUTTON SINGLE**



80.300.184

**TOUCH DIMMER
BUTTON DUO**



21.300.014

BLIND PLATE



13.300.014

**MODULAR JACK 2-GANG
WITH CENTRAL PLATE**



13.300.114

**MODULAR JACK 30°
2-GANG WITH
CENTRAL PLATE**

V1
COVER FRAMES



80.300.115



80.300.215



80.300.315



80.300.415



80.300.515

J1
COVER FRAMES



80.301.115



80.301.215



80.301.315



80.301.415



80.301.515

D1
COVER FRAMES



80.303.115



80.303.215



80.303.315




80.303.415



80.303.515

ONE FOUNDATION, THREE STYLES

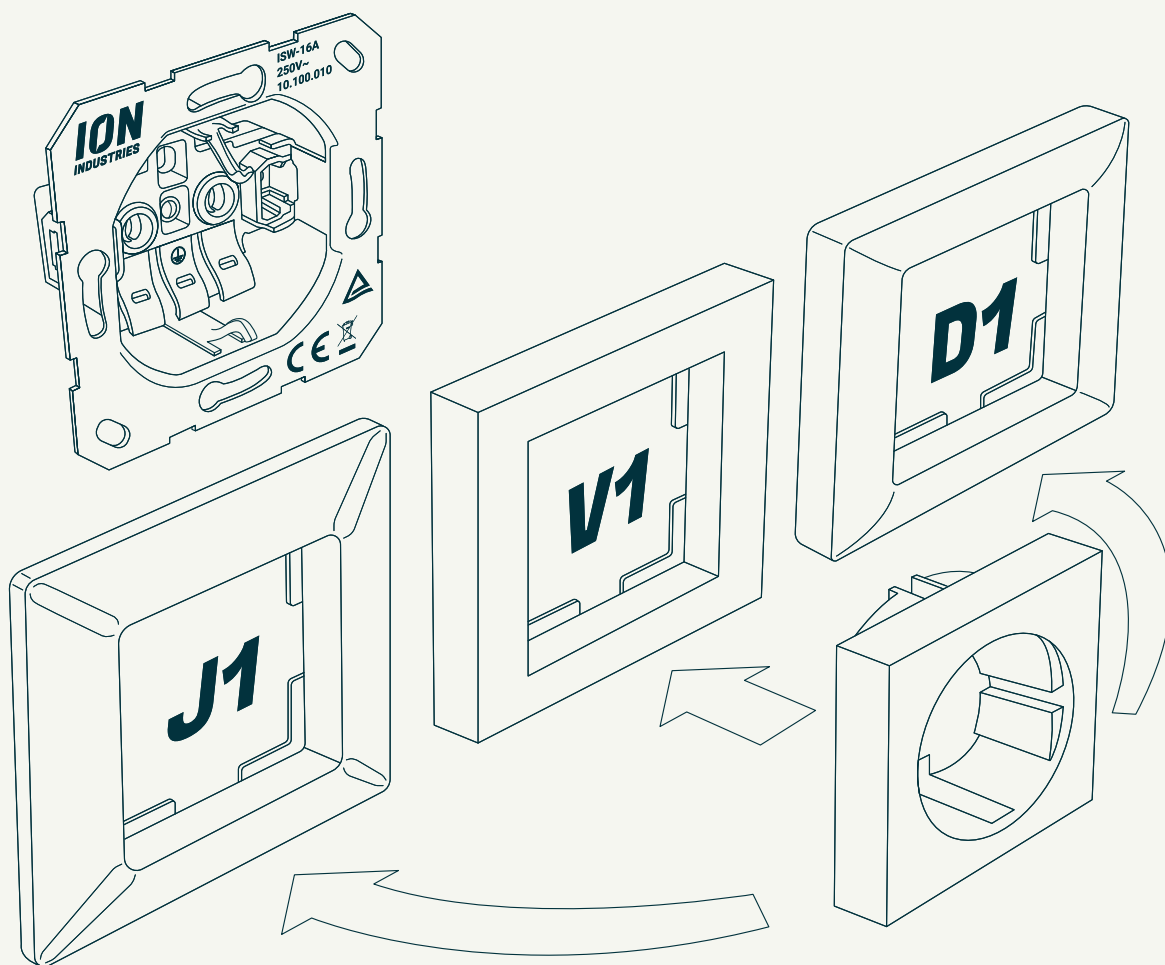

All products from the V1, J1 and D1 series are fully interchangeable.
This allows you to combine different looks with one interior.



10.300.415

WALL SOCKET PE **USB A + USB C** WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 32 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 3 A
- Certification: TUV



10.300.815

**WALL SOCKET RA WITH
HINGED COVER IP44 AND
TOUCH PROTECTION**



10.100.015

**WALL SOCKET WITH
PROTECTIVE EARTH**



10.300.915

**WALL SOCKET WITHOUT
PROTECTIVE EARTH WITH
TOUCH PROTECTION**



10.300.215

**WALL SOCKET WITH
PROTECTIVE EARTH
AND TOUCH PROTECTION**



10.300.515

WALL SOCKET PE **2x USB C** WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 36 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 7 A
- Certification: CE





20.300.015

**ROCKER
TWO-WAY SWITCH**



20.300.115

**ROCKER
TWO-GANG SWITCH**



20.300.215

**BLIND
SWITCH ROCKER**



20.300.515

**CENTRAL PLATE
CHARGER USB A + USB C**




20.300.415

**CENTRAL PLATE
DIMMER BUTTON DUO**



11.300.115

**CENTRAL PLATE WITH
ROTARY KNOB
3-POSITION SWITCH
WITH CENTRE-OFF**



20.300.315

**CENTRAL PLATE DIMMER
BUTTON SINGLE**



20.300.615

**CENTRAL PLATE DIMMER
BUTTON SINGLE FOR
INDICATOR LIGHT**



80.300.085

**TOUCH DIMMER
BUTTON SINGLE**



80.300.185

**TOUCH DIMMER
BUTTON DUO**



21.300.015

BLIND PLATE



13.300.015

**MODULAR JACK 2-GANG
WITH CENTRAL PLATE**



13.300.115

**MODULAR JACK 30°
2-GANG WITH
CENTRAL PLATE**

V1
COVER FRAMES



80.300.120



80.300.020



80.300.316



80.300.416



80.300.516

J1
COVER FRAMES



80.301.116



80.301.216



80.301.316



80.301.416



80.301.516

D1
COVER FRAMES



80.303.116



80.303.216



80.303.316




80.303.416



80.303.516

VARIATION IN EVERY ROOM

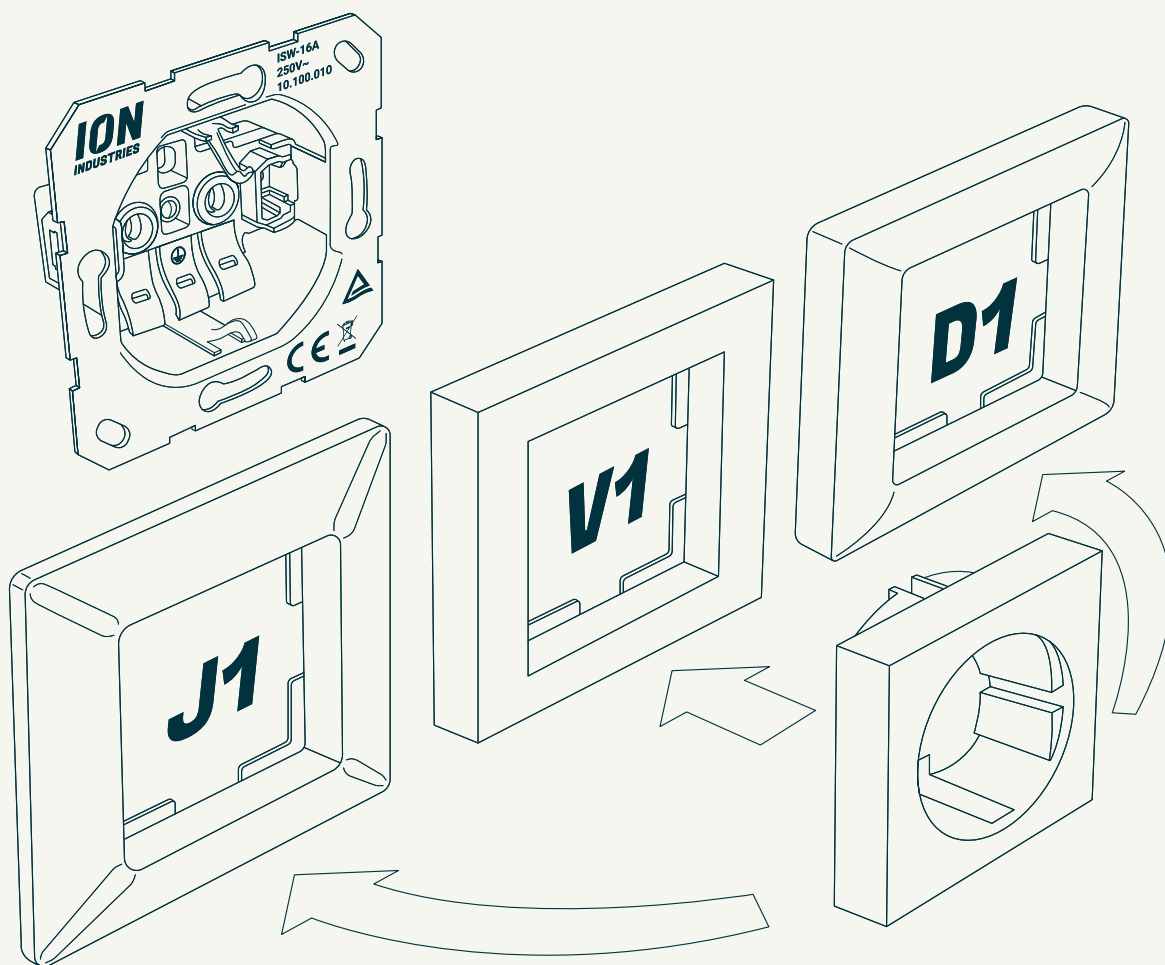

The V1, J1 and D1 series combine effortlessly with each other.
Change the look of each room, while the interior remains the same.



10.300.416

WALL SOCKET PE **USB A + USB C** WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 32 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 3 A
- Certification: TUV



10.300.816

**WALL SOCKET RA WITH
HINGED COVER IP44 AND
TOUCH PROTECTION**



10.100.020

**WALL SOCKET WITH
PROTECTIVE EARTH**



10.300.916

**WALL SOCKET WITHOUT
PROTECTIVE EARTH WITH
TOUCH PROTECTION**



10.300.216

**WALL SOCKET WITH
PROTECTIVE EARTH
AND TOUCH PROTECTION**




10.300.516

WALL SOCKET PE **2x USB C** WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 36 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 7 A
- Certification: CE





20.300.016

**ROCKER
TWO-WAY SWITCH**



20.300.116

**ROCKER
TWO-GANG SWITCH**




20.300.216

**BLIND
SWITCH ROCKER**



20.300.516

**CENTRAL PLATE
CHARGER USB A + USB C**



20.300.416

**CENTRAL PLATE
DIMMER BUTTON DUO**




11.300.116

**CENTRAL PLATE WITH
ROTARY KNOB THREE-
POSITION SWITCH WITH
ZERO SETTING**



20.300.316

**CENTRAL PLATE DIMMER
BUTTON SINGLE**



80.300.090

**TOUCH DIMMER
BUTTON SINGLE**



80.300.190

**TOUCH DIMMER
BUTTON DUO**



21.300.016

BLIND PLATE



13.300.016

**MODULAR JACK 2-GANG
WITH CENTRAL PLATE**



13.300.116

**MODULAR JACK 30°
2-GANG WITH
CENTRAL PLATE**





E1-SERIES

The E1 series makes it easy to add character to your interior. The distinctive curvature of the cover frames and inner components creates a unique look. Available in Alpine White, Matt Alpine White and Matt Black, to suit any space.

E1 COVER FRAMES



80.302.114



80.302.214



80.302.314



80.302.414



80.302.514



10.302.414

WALL SOCKET PE USB A + USB C WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 32 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 3 A
- Certification: TUV



10.302.514


WALL SOCKET PE 2x USB C WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 36 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 7 A
- Certification: CE






20.302.414
CENTRAL PLATE
DIMMER BUTTON DUO




11.302.114
CENTRAL PLATE WITH
ROTARY KNOB
3-POSITION SWITCH
WITH CENTRE-OFF



20.302.314
CENTRAL PLATE DIMMER
BUTTON SINGLE




20.302.614
CENTRAL PLATE DIMMER
BUTTON SINGLE FOR
INDICATOR LIGHT



20.302.014
ROCKER
TWO-WAY SWITCH



20.302.114
ROCKER
TWO-GANG SWITCH



20.302.214
BLIND
SWITCH ROCKER



20.302.514
CENTRAL PLATE
CHARGER USB A + USB C




21.302.014
BLIND PLATE



13.302.014
MODULAR JACK 2-GANG
WITH CENTRAL PLATE



13.302.114
MODULAR JACK 30° 2-GANG
WITH CENTRAL PLATE

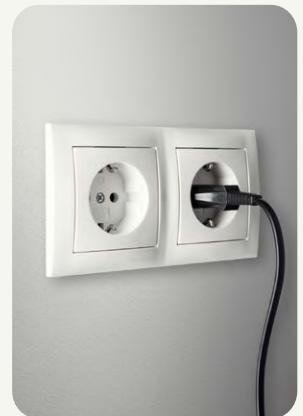

10.302.814
WALL SOCKET RA WITH
HINGED COVER IP44 AND
TOUCH PROTECTION



10.302.014
WALL SOCKET WITH
PROTECTIVE EARTH



10.302.914
WALL SOCKET WITHOUT
PROTECTIVE EARTH WITH
TOUCH PROTECTION



10.302.214
WALL SOCKET WITH
PROTECTIVE EARTH
AND TOUCH PROTECTION

E1 COVER FRAMES



80.302.115



80.302.215



80.302.315



80.302.415



80.302.515



10.302.415

WALL SOCKET PE USB A + USB C WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 32 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 3 A
- Certification: TUV



10.302.515

WALL SOCKET PE 2x USB C WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 36 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 7 A
- Certification: CE






20.302.415

**CENTRAL PLATE
DIMMER BUTTON DUO**



11.302.115

**CENTRAL PLATE WITH
ROTARY KNOB
3-POSITION SWITCH
WITH CENTRE-OFF**



20.302.315

**CENTRAL PLATE DIMMER
BUTTON SINGLE**




20.302.615

**CENTRAL PLATE DIMMER
BUTTON SINGLE FOR
INDICATOR LIGHT**




20.302.515

**CENTRAL PLATE
CHARGER USB A + USB C**




20.302.115

**ROCKER
TWO-GANG SWITCH**



20.302.215

**BLIND
SWITCH ROCKER**



20.302.015

**ROCKER
TWO-WAY SWITCH**



21.302.015

BLIND PLATE




13.302.015

**MODULAR JACK 2-GANG
WITH CENTRAL PLATE**



13.302.115

**MODULAR JACK 30° 2-GANG
WITH CENTRAL PLATE**

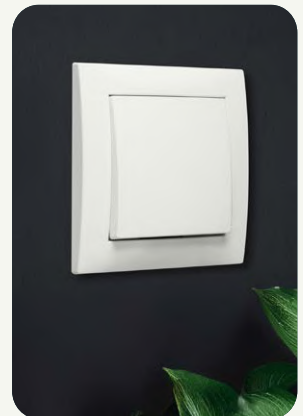

10.302.815

**WALL SOCKET RA WITH
HINGED COVER IP44 AND
TOUCH PROTECTION**



10.302.015

**WALL SOCKET WITH
PROTECTIVE EARTH**



10.302.915

**WALL SOCKET WITHOUT
PROTECTIVE EARTH WITH
TOUCH PROTECTION**



10.302.215

**WALL SOCKET WITH
PROTECTIVE EARTH
AND TOUCH PROTECTION**

E1 COVER FRAMES



80.302.116



80.302.216



80.302.316



80.302.416



80.302.516



10.302.416

WALL SOCKET PE USB A + USB C WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 32 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 3 A
- Certification: TUV



10.302.516

WALL SOCKET PE 2x USB C WITH TOUCH PROTECTION

- Touch protection
- Amperage: 16 A
- Maximum wattage: 3680 W
- Dimensions: 71 × 71 × 36 mm
- Mounting: Push-in terminal
- Enclosure class: IP20
- Maximum USB port voltage: 5 V
- Maximum USB port current: 7 A
- Certification: CE





20.302.416

**CENTRAL PLATE
DIMMER BUTTON DUO**



11.302.116

**CENTRAL PLATE WITH
ROTARY KNOB
3-POSITION SWITCH
WITH CENTRE-OFF**



20.302.316

**CENTRAL PLATE DIMMER
BUTTON SINGLE**



20.302.516

**CENTRAL PLATE
CHARGER USB A + USB C**




20.302.116

**ROCKER
TWO-GANG SWITCH**



20.302.216

**BLIND
SWITCH ROCKER**



20.302.016

**ROCKER
TWO-WAY SWITCH**



21.302.016

BLIND PLATE



13.302.016

**MODULAR JACK 2-GANG
WITH CENTRAL PLATE**



13.302.116

**MODULAR JACK 30° 2-GANG
WITH CENTRAL PLATE**



10.302.816

**WALL SOCKET RA WITH
HINGED COVER IP44 AND
TOUCH PROTECTION**



10.302.016

**WALL SOCKET WITH
PROTECTIVE EARTH**



10.302.916

**WALL SOCKET WITHOUT
PROTECTIVE EARTH WITH
TOUCH PROTECTION**



10.302.216

**WALL SOCKET WITH
PROTECTIVE EARTH
AND TOUCH PROTECTION**



SURFACE-MOUNTED IP55

Discover the reliable protection of the surface-mounted IP55 series. This series is designed for damp and demanding environments. From the garden to the shed, Surface Mount IP55 switches and wall sockets can withstand harsh conditions. Available in Grey and Black.



55.100.000

**M20 CABLE GLAND WITH STRAIN
RELIEF 7-12 MM GREY**



55.200.030

**M20 CABLE GLAND WITH STRAIN
RELIEF 7-12 MM BLACK**



55.100.010

**SURFACE-MOUNTED
2-WAY SWITCH
GREY**



55.100.030

**SURFACE-MOUNTED
2-GANG SWITCH
GREY**



55.100.070

**SURFACE-MOUNTED
WALL SOCKET
GREY**



55.100.080

**SURFACE-MOUNTED
WALL SOCKET 2-GANG
HORIZONTAL GREY**



55.100.090

**SURFACE-MOUNTED
COMBINATION WALL SOCKET
AND 2-WAY SWITCH
HORIZONTAL GREY**



55.100.110

**SURFACE-MOUNTED
COMBINATION WALL SOCKET
AND 2-GANG SWITCH
HORIZONTAL GREY**



55.100.170

**SURFACE-MOUNTED
WALL SOCKET 2-GANG
VERTICAL GREY**



55.100.180

**SURFACE-MOUNTED
WALL SOCKET 3-GANG
HORIZONTAL GREY**



55.100.190

**SURFACE-MOUNTED IP55
COMBINATION WALL SOCKET
AND 2-WAY SWITCH
VERTICAL GREY**



55.100.200

**SURFACE-MOUNTED IP55
COMBINATION WALL SOCKET
AND 2-GANG SWITCH
VERTICAL GREY**



55.200.200

**SURFACE-MOUNTED IP55
COMBINATION WALL SOCKET
AND 2-GANG SWITCH
VERTICAL BLACK**



55.200.190

**SURFACE-MOUNTED IP55
COMBINATION WALL SOCKET
AND 2-WAY SWITCH
VERTICAL BLACK**



55.100.180

**SURFACE-MOUNTED
WALL SOCKET 3-GANG
HORIZONTAL BLACK**



55.200.170

**SURFACE-MOUNTED
WALL SOCKET 2-GANG
VERTICAL BLACK**



55.200.110

**SURFACE-MOUNTED
COMBINATION WALL SOCKET
AND 2-GANG SWITCH
HORIZONTAL BLACK**



55.200.090

**SURFACE-MOUNTED
COMBINATION WALL SOCKET
AND 2-WAY SWITCH
HORIZONTAL BLACK**



55.200.080

**SURFACE-MOUNTED
WALL SOCKET 2-GANG
HORIZONTAL BLACK**




55.200.070

**SURFACE-MOUNTED
WALL SOCKET
BLACK**



55.200.030

**SURFACE-MOUNTED
2-GANG SWITCH
BLACK**



55.200.010

**SURFACE-MOUNTED
2-WAY SWITCH
BLACK**



ADDITIONAL SWITCHING MATERIAL

Everything you need in one place. This category includes half-mounted products, dimmer stabilizers and indicator lights in various colours. Practical and versatile.



10.300.614

**HALF SURFACE-MOUNTED
WALL SOCKET 2-GANG
PROTECTIVE EARTH
USB A + USB C ALPIN WHITE**



10.300.616

**HALF SURFACE-MOUNTED
WALL SOCKET 2-GANG
PROTECTIVE EARTH
USB A + USB C MATT BLACK**



10.300.714

**WALL SOCKET HALF
SURFACE-MOUNTED
2-GANG PROTECTIVE
EARTH ALPIN WHITE**



10.300.716

**WALL SOCKET HALF
SURFACE-MOUNTED
2-GANG PROTECTIVE
EARTH MATT BLACK**




12.100.009

**CONNECTOR
UTP - CAT6**



14.100.009

**CONNECTOR
COAX - TV**



99.050.000

**LED DIMMING
STABILIZER**



10.300.500

**JUNCTION BOX CHARGER
USB A + USB C**



99.100.120

**INDICATOR LIGHT
BLUE FOR
LED DIMMER WITH
INDICATOR LIGHT**



99.100.121

**INDICATOR LIGHT
WARM WHITE FOR
LED DIMMER WITH
INDICATOR LIGHT**



99.100.122

**INDICATOR LIGHT
RED FOR
LED DIMMER WITH
INDICATOR LIGHT**



99.100.123

**INDICATOR LIGHT
FUCHSIA FOR
LED DIMMER WITH
INDICATOR LIGHT**



40.100.010

12 VOLT LED DRIVER 50 WATT DIMMABLE



99.100.100

COVER MATERIAL REMOVAL TOOL




REMOVE COVER MATERIAL EASILY AND WITHOUT DAMAGE USING THE COVER MATERIAL REMOVAL TOOL.




EMERGENCY LIGHTING

With emergency lighting from ION INDUSTRIES, you are choosing certainty. It's made with the best components and thoroughly tested, so quality is always guaranteed. And the best part? You can install it in a flash. Technical specifications can be found on our website.

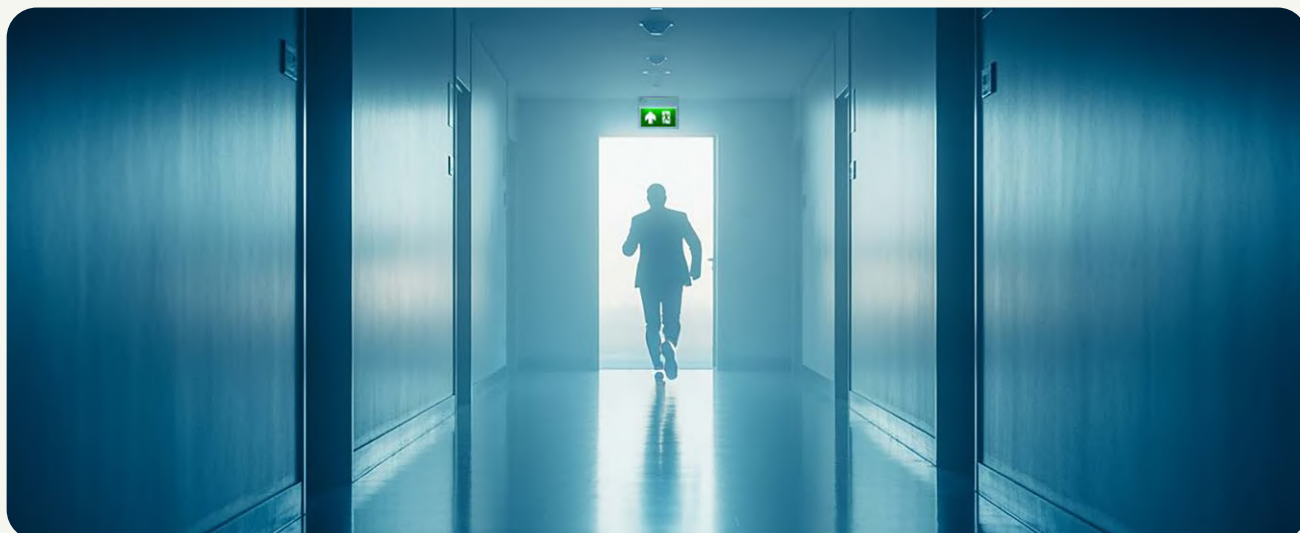

60.100.012

**EXIT LIGHT
WHITE**



60.100.013

**EXIT LIGHT
BLACK**



60.100.030

**EMERGENCY LIGHT
SURFACE-MOUNTED
SQUARE WHITE**



60.100.031

**EMERGENCY LIGHT
SURFACE-MOUNTED
SQUARE BLACK**



60.100.020

**EMERGENCY LIGHT
FLUSH-MOUNTED**



60.100.035

**EMERGENCY LIGHT
SURFACE-MOUNTED
ROUND WHITE**



60.100.036

**EMERGENCY LIGHT
SURFACE-MOUNTED
ROUND BLACK**



60.100.050

**EMERGENCY LIGHT
IP65**



60.100.070

EMERGENCY LIGHT EU900



60.100.040

EMERGENCY LIGHT FLUSH-MOUNTED MINI

ION

INDUSTRIES

ION INDUSTRIES

Symfonielaan 12,
3438 EV Nieuwegein,
Nederland

info@ionindustries.com
+31 (0)85 – 489 05 25

Our LED Dimmers are compatible with most brands, including:

GIRA

merten

B.
Berker

ION INDUSTRIES

PEHA

JUNG


niko

Kopp



BUSCH-JAEGER

Q-LINK®



8 718836 970887